

		M			SZT	MM	MM	KM	KG
5200	GAL-K 4,0 H HD	4,00	+	rubber	32	1000	ø 560	160	3655
5205	GAL-K 5,0 H HD	5,00	+	rubber	40	1000	ø 560	180	4000
5210	GAL-K 6,0 H HD	6,00	+	rubber	48	1000	ø 560	200	4400

OPTIONAL EQUIPMENT

- Bolted disc hubs (set)
- Disc D=610/5 mm (set)
- Thick Disc D=610/6 mm (set)
- Disc RZ D=560/5 mm or 610/5 mm (set)
- Shallow Disc D=560/5 mm (set)
- Shallow Disc D=610/5 mm (set)
- Stone protection plate (set)
- Tubular roller D=540 mm or D=620mm
- T-ring roller D=600 mm
- V-ring roller D=600 mm
- V-ring roller with paddles D=600 mm
- C-ring roller D=600 mm
- C-ring Tandem roller D=600 mm
- C-ring Tandem HD roller D=600 mm
- Spring roller D=560 mm
- Packer roller D=600 mm
- Rubber roller D=500 mm
- Disc roller D=600 mm
- Tine cultivator behind roller (BPZW)
- Middle solid screen (ES)
- Middle tine screen (EA)
- Support wheels 10,0/80×12" (set)
- Wheels 620/40-22.5" (set)
- Mudguards (set)
- Ball hitch K80
- Hydraulic box with a switch control module
- Hitch damping kit
- LED lights
- Pneumatic brakes
- Hydraulic brakes
- Cultivator SKAN
- Hydraulic adjustment SKAN



TUBULAR ROLLER D=540MM OR D=620MM

Recommended for light and medium soil



C-RING ROLLER D=600 MM

Recommended for medium and heavy soil. Offering soil-to-soil action. Creates grooves on a field's surface – good for water penetration.



RUBBER ROLLER D=500 MM

Good for a reduced tillage operations. Great soil compression due to large pressing area.



SPRING ROLLER D=560 MM

Each roller ring is built of 4 independent springs, thanks to which the wheels fall into a characteristic vibration, which ensures better compaction and leveling of the ground even in difficult cultivation conditions



V-RING ROLLER D=600 MM

Recommended for medium and heavy soil. Good crumbling and pressing action. Creates grooves on a field's surface – good for water penetration.



PACKER ROLLER D=600 MM

Recommended for medium and heavy soil. Exceptional crumbling and pressing action. Very aggressive, ideal for pre-sowing cultivation.



T-RING ROLLER D=600 MM

A ring roller recommended for heavy, stony and lumpy soil. It offers a perfect crumbling of the surface, while leaving grooves on a field's surface.




C-RING TANDEM HD ROLLER D=600 MM

Standard C-ring rims welded to the oversized axle design for additional toughness. Recommended for toughest conditions.




DISC ROLLER D=600 MM

This roller is designed for heavy conditions. Due to heavy weight roller presses crop residues into the soil, and covers those with earth, while leveling the ground at the same time.

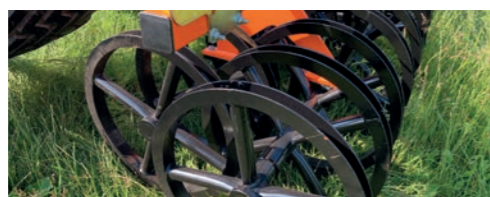

C-RING TANDEM ROLLER D=600 MM

Recommended for medium and heavy soil. Offering soil-to-soil action. Creates grooves on a field's surface – good for water penetration. Due to large contact area, it is offering exceptional working depth control when aggregated with a large and heavy machines.

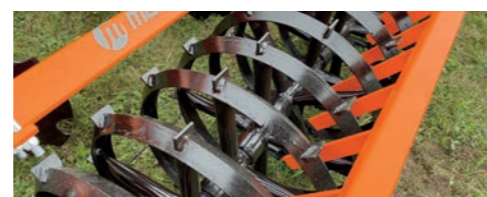

V-RING ROLLER WITH PADDLES D=600 MM

Recommended for medium and heavy soil. Good crumbling and pressing action. Creates grooves on a field's surface – good for water penetration. Additional paddles provide some extra crushing action.

Disc harrow GAL-K HD



Disc harrow GAL-K HD

GAL-K HD disc harrows – designed with an extra robustness in mind. Comparing to regular GAL-K, HD model offers as follows: reinforced frame structure, quad cylinder folding mechanism, integrated transport chassis with suspension placed in between discs and the roller, hydraulic working depth adjustment, and more. Maintenance free MANDAM hubs with 5-year warranty, together with variety of available discs, ensure outstanding working efficiency. There are 10 different rollers to choose from, as well as many other accessories. This ensures great configuration abilities



mandam.com.pl/en/gal-k-hd-en

Mandam Sp. z o.o.
Poland
44-100 Gliwice,
ul. Toruńska 14
0048 32 232 26 60
mandam.com.pl

STANDARD EQUIPMENT

- reinforced frame
- rear axle suspension
- quad hydraulic piston folding system
- 5-year warranty maintenance free hub
- disc D=560mm
- rubber dampers
- hydraulic working depth adjustment (HRGP)
- wheels 480/45-17"
- side screens with rubber damping

REAR AXLE SUSPENSION

ELEMENT MADE OF S690 QL

QUAD HYDRAULIC PISTON FOLDING SYSTEM

3-POINT HITCH MADE OF S690 QL

CULTIVATOR SKAN (OPTION)

PROFIL 80X80X8 MM

RUBBERS D=45 MM

C-RING TANDEM HD ROLLER D=600 MM (OPTION)

REINFORCED FRAME

